





# 1 SERIES: 1.1


<http://tiny.cc/multione1-1EN>


| Model                                      | 1.1                                 |
|--|-------------------------------------|
| Engine                                     | Yanmar L100 - 1 cylinder - 435cc    |
| Emission Standards                         | Stage V and Tier 4 Final            |
| Power (Iso Gross) / Torque                 | 12 HP / 21 Nm @ 3000 rpm            |
| Fuel                                       | Diesel                              |
| Transmission                               | Hydrostatic                         |
| Drive speed (max.)                         | 8 km/h (5 mph)                      |
| Aux. hydraulics oil flow                   | 19 l/min (5 GPM)                    |
| Max. lifting height                        | 1,8 m (70.9 in)                     |
| Tipping load, max. <sup>(1)</sup>          | 320 kg (705 lbs)                    |
| Lifting capacity, max. <sup>(2)</sup>      | 250 kg (551 lbs)                    |
| Breakout force / 50 cm (19.7 in)           | 250 kg (551 lbs)                    |
| Pushing force (c)                          | 500 kgf (500 kp)                    |
| Average ground pressure (w/standard tires) | 298 kg/m <sup>2</sup> (61 lbs/sqft) |
| Turning radius: inside/outside             | 0/993 mm (0/39 in)                  |
| Standard tires (Tractor profile)           | 18x9.50-8                           |
| Weight                                     | 398 kg (880 lbs)                    |
| Product Code                               | <b>C926006</b>                      |

<sup>(1)</sup> Tipping limit with rear weights and boom lifted just off the ground. Weight of attachment included.

<sup>(2)</sup> Maximum load that can be lifted just off the ground. Weight of attachment is included.

Note: Refer to the Operator's manual for the comprehensive load diagram.

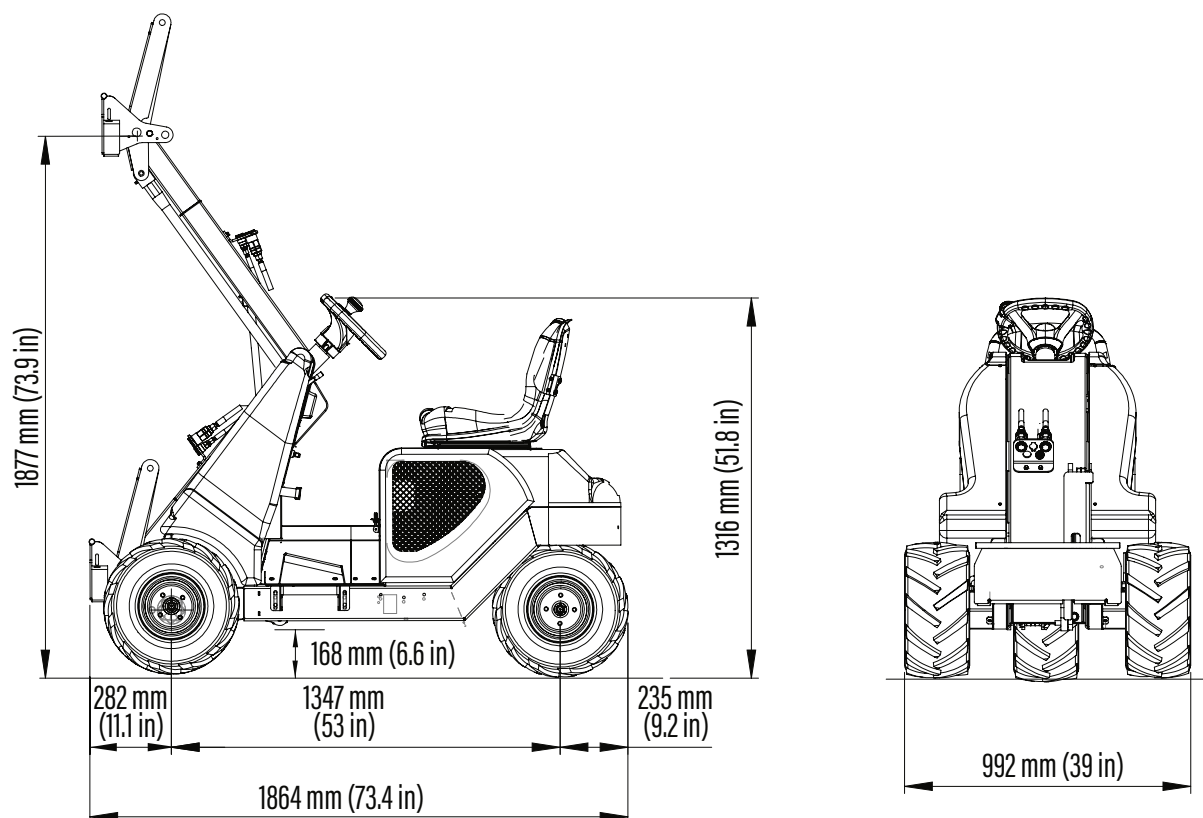

## FEATURES

- YANMAR L100 engine, 1 cylinder, diesel engine, 435 cc, air cooled with electric start
- Stage V and Tier 4 Final compliant engine
- 3WD hydrostatic transmission with differential lock
- Variable displacement drive pump
- 3 line hydraulic outlets
- Boom with self-levelling
- 4-functions joystick
- Ergonomic seat with adjustable position
- Mechanical parking brake

| Options                        | CODE    |
|--------------------------------|---------|
| Gps tracker                    | C883075 |
| Turf tires 18x9.50-8, set of 3 | C885023 |